

DO NOT SCALE


269A9216

A

KIT

REVISIONS

SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DATE
A		RELEASES S.O. N° 1	CH		

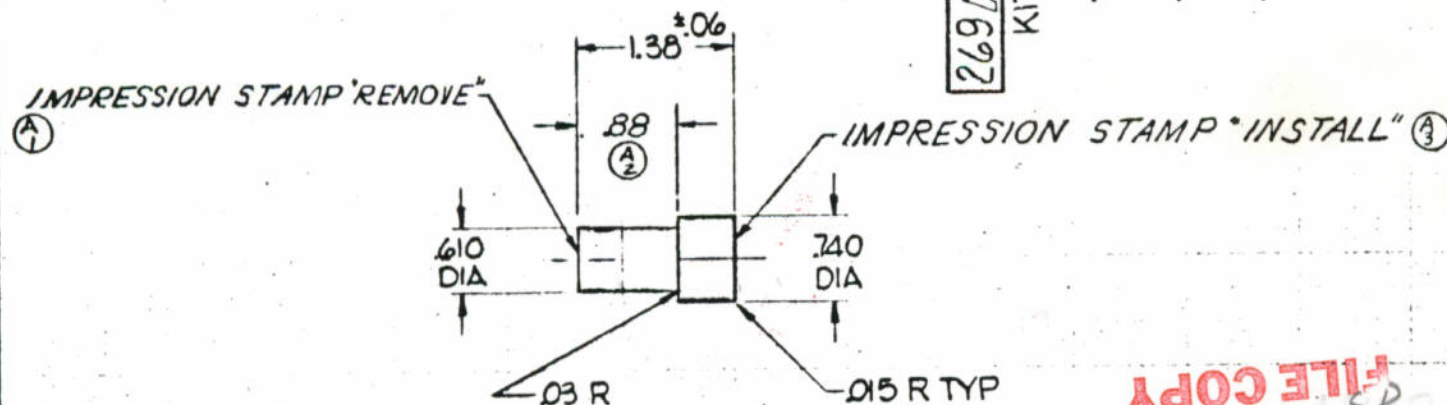

NOTES:

1. IDENTIFY PER HP 8-5 (IMPRESSION STAMP)
2. BLACK OXIDE PER HP 4-50
3. HEAT TREAT TO Rc 34-38 PER HPI-1
4. SURFS ¹²⁵

REDUCED SIZE PRINT

REQD	PART NO.	REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION
					.75 DIA ROD	SAE 4130 STL	MIL-S-6758
ASSEMBLY OPP.				LIST OF MATERIAL			
UNLESS OTHERWISE SPECIFIED				DRWN BENEFIEL 84-6 CHK'D 84-6 APP'D 8-2 APP'D 8-2 APP'D 8-2 APP'D APP'D APP'D			
DIMENSIONAL TOLERANCES 3 PLACE DECIMAL ± .010 2 PLACE DECIMAL ± .03 ANGULAR ± 0°30'				PUNCH- 07412 SEAL INSTALLATION			
DIMENSIONS TO BE MET BEFORE PLATING.				HUGHES TOOL COMPANY AIRCRAFT DIVISION CULVER CITY, CALIFORNIA 269A9216			
CORNER RADIUS .062 ON C' BORES AND SPOT FACES OF 1.250 DIA. OR LESS — .093 RADIUS ON GREATER THAN 1.250 DIA.				SCALE FULL			
NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY	CODE 02731 SHEET 1 OF 1			
APPLICATION		QTY REQD					